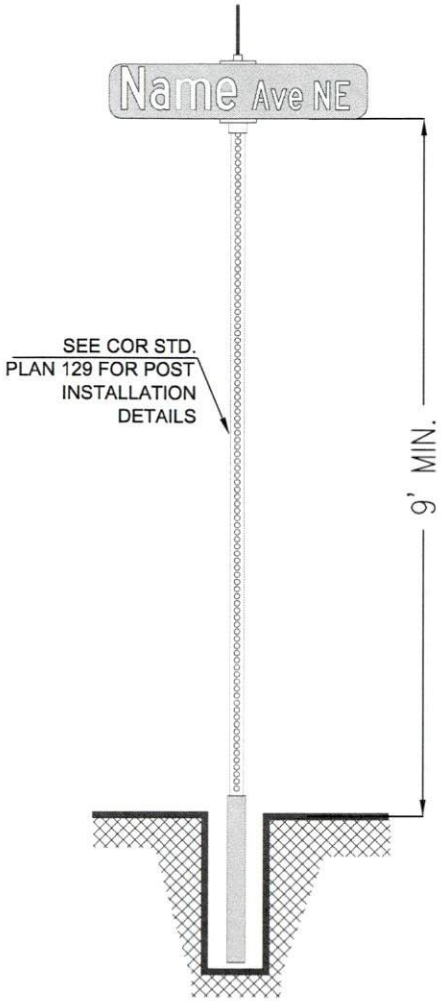

TYPICAL INSTALLATION

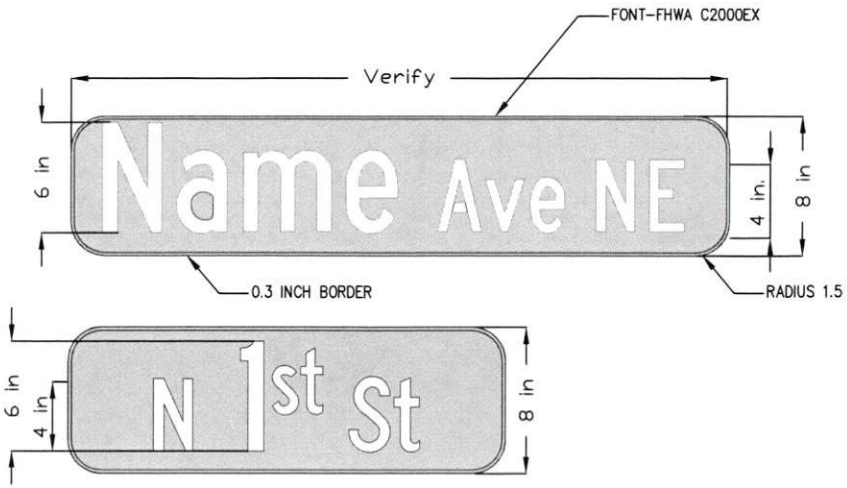

NOTES:

1. SIGNS SHALL BE WHITE LETTERING ON GREEN BACKGROUND WITH A 0.3" (IN) BORDER, DOUBLE SIDED.
2. SIGN BLADE SHALL BE 8" FLAT ALUMINUM, TREATED, 0.080 GAUGE.
3. SIGN SHEETING SHALL BE 3M HIGH INTENSITY PRISMATIC OR APPROVED EQUAL.
4. LETTERING SHALL BE CUT FROM 3M ELECTROCUT (EC) FILM SERIES 1170 OR APPROVED EQUAL.
5. FONT SHALL BE FHWA C2000EX UPPER AND LOWER CASE PER SECTION 2D.43 OF THE M.U.T.C.D.
6. POST SHALL BE MINIMUM OF 2"X2" SQUARE TUBE. SEE STANDARD DETAIL 129 FOR INSTALLATION DETAILS.

CITY OF RENTON

PUBLIC WORKS DEPARTMENT

GROUND MOUNTED STREET NAME SIGNS (FOR SPEED LESS THAN 40 MPH)

STD. PLAN- 134

APPROVED: G.Z.

DATE 9/26/16